

— **SPG** —





— **LIFT-A-LOFT** —

*An Industry Leader for 50 Years*

# SELF PROPELLED GAS SCISSOR LIFT SERIES

Self Propelled Gas scissor lifts are designed as a maneuverable work platform for construction, remodeling, and maintenance. With a large platform, high capacity, and maneuverability, this unit is ideal for many applications. Unit may be driven at any elevation, allowing for increased productivity.

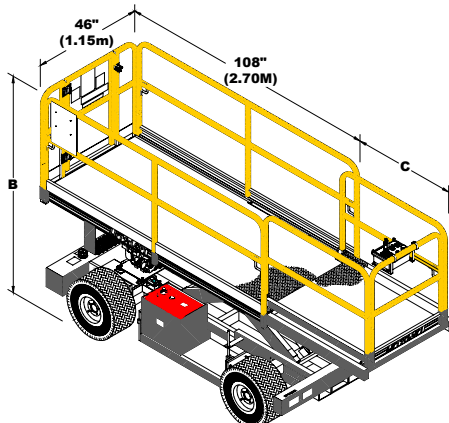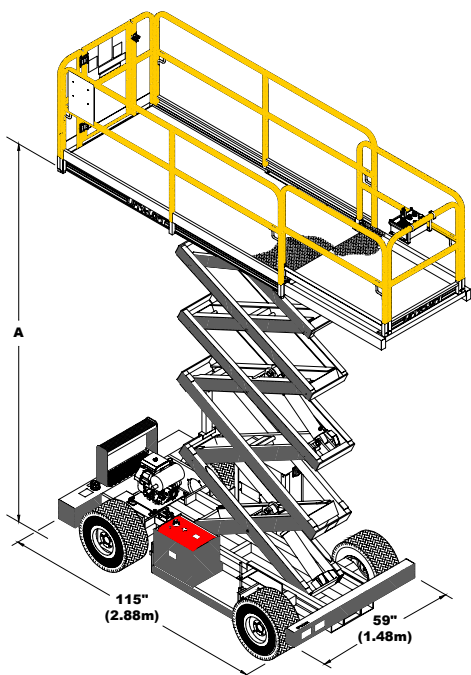

| Model No.                           | SPG19                        | SPG24                 |
|-------------------------------------|------------------------------|-----------------------|
| <b>A</b><br>Max Platform Height     | 19' 4"<br>(5.80m)            | 23' 10"<br>(7.15m)    |
| <b>B</b><br>Travel Height           | 79"<br>(1.98m)               | 86"<br>(2.15m)        |
| <b>C</b><br>(Optional) Extenda-deck | 4' or 7'<br>(1.22m or 2.13m) |                       |
| Platform Capacity                   | 1500 lbs<br>(680.4 kg)       | 750 lbs<br>(340.2 kg) |
| Unit Weight                         | 4450 lbs<br>(2019 kg)        | 5350 lbs<br>(2427 kg) |

## Specifications \* \*\*

Platform Lift Speed – 0.6 ft/sec (0.18 m/sec)  
 Platform Lower Speed – 0.6 ft/sec (0.18 m/sec)  
 Travel Speed (Lowered): 0 – 2.6 mph (0 – 4.18 km/hr)  
 Travel Speed (Elevated): 0 – 0.7 mph (0 – 1.13 km/hr)  
 Gradeability – 22%  
 Dual Wheel Hydraulic Drive  
 Inside Turning Radius – 4' 8" (1.42 m)  
 Tires – 23 x 10.5" Soft Grip  
 Brakes – Spring Applied, Pressure Release  
 25 HP Gasoline Engine  
 Hour Meter  
 Paint Color – Smoke Gray with Yellow Guard Rails  
 Units meet or exceed all OSHA and ANSI Standards

\*Published performance characteristics are average and may be affected by temperature and load on platform.

\*\* LIFT-A-LOFT products are continuously evaluated for improvements. Specifications are subject to change without notice.

## Safety Features

- Deadman Two Hand Operation
- Momentary Contact Steering Control
- Anti-skid Tread Plate
- Guardrails with Mid-rail & Toe Board
- Self-closing, Self-latching Entrance Gate
- Pressure Compensating Hydraulic Flow Control
- Manual Over-ride Lowering Control
- Holding Valves on All Lift Cylinders
- Built In Scissor Spreader
- Return to Neutral Controls
- Emergency Stop Switch
- Lanyard Attach Points
- Horn for Sounding Warning
- Ground Fault Interrupt for 115 VAC Circuit to Platform

## Options

- |  |   |
|--|---|
| <ul style="list-style-type: none"> <li>• 4' or 7" Extenda-deck</li> <li>• Dual Fuel</li> <li>• Diesel Engine</li> <li>• Super Terra-Grip Tires</li> <li>• Special Paint</li> <li>• Air Line to Platform</li> </ul> | <ul style="list-style-type: none"> <li>• Flashing or Rotating Lights</li> <li>• All Motion Alarm</li> <li>• Work Lights</li> <li>• Aircraft Bumpers</li> <li>• Padded Rails</li> <li>• Contact LIFT-A-LOFT for Custom Designed Units</li> </ul> |
|--|---|

# LIFT-A-LOFT

9501 South Center Road, Muncie, IN 47302-9443, USA  
 Phone: 765-288-3691

P.O. Box 2645, Muncie, IN 47307-0645, USA  
 Fax: 765-284-1023

www.lift-a-loft.com